



# 9.9/15 25HP


## ProKicker™

### QUIET PERFORMANCE. PRECISE SPEEDS. COMPLETE CONTROL.

Mercury ProKicker outboards enable precision boat control for a wide range of fishing applications. Quiet, smooth and efficient, they make long hours of trolling more productive – and more enjoyable. Choose from remote controls for helm steering or an intuitive tiller for instant steering response while contour trolling.

- Electronic fuel injection delivers surefire starting in all weather.
- High-thrust four-blade props enhance speed control at low rpm.
- Standard power tilt makes stowing and deploying easy.
- Centering straps automatically stabilize tiller models when tilted up.
- Class-leading alternator provides powerful battery-charging output at all speeds.

LEARN MORE AT [MERCURYMARINE.COM/PROKICKER](http://MERCURYMARINE.COM/PROKICKER)

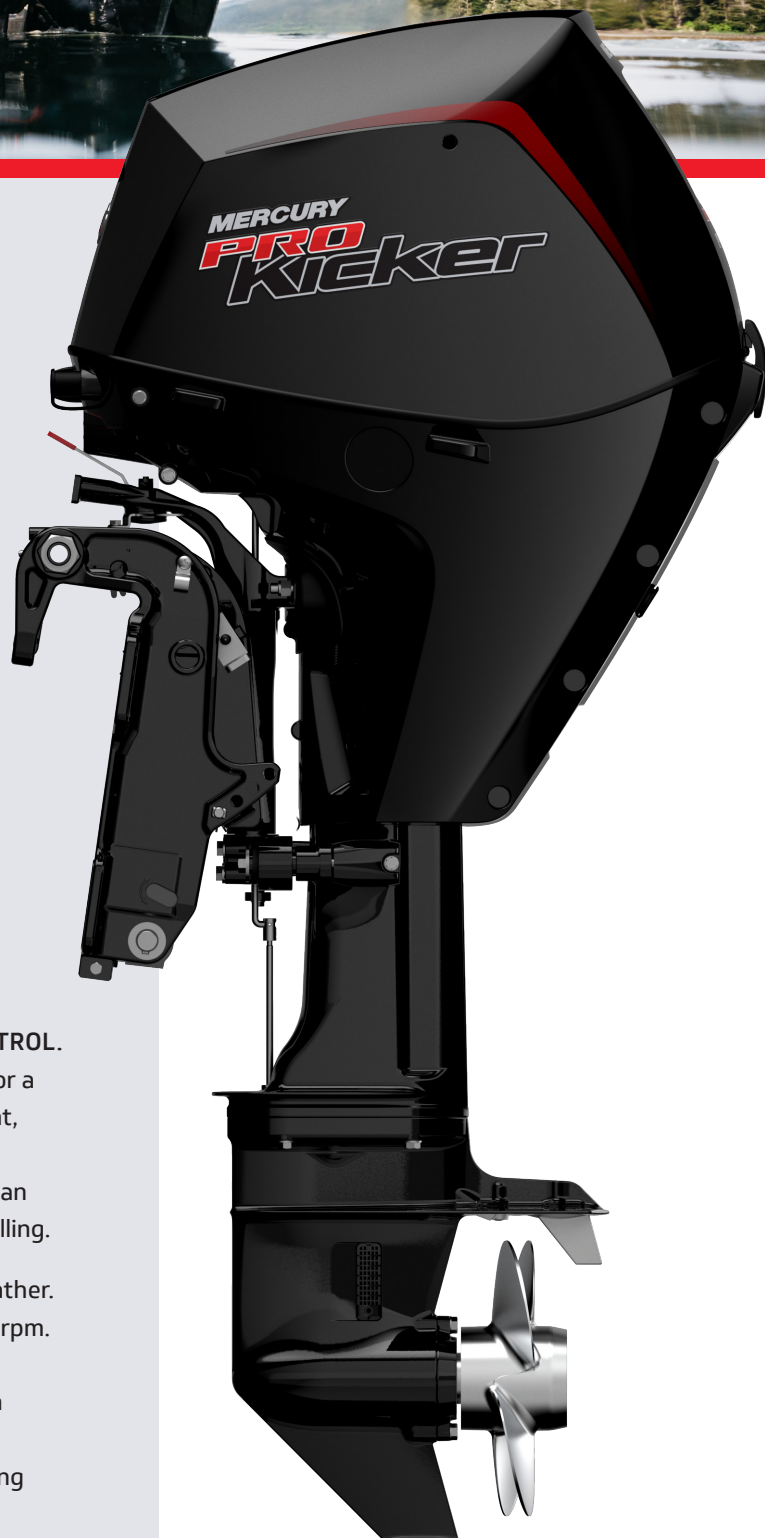

 **MERCURY**  
GO BOLDLY.®

# MERCURY TILLERS: BETTER BOAT CONTROL



## 15/25HP TILLER

- Adjustable Vertically and Laterally  
*For comfortable steering*
- Reversible Throttle Grip  
*For left- or right-handed operation*
- Oversized Shift Lever
- Easy-Reach Stop Button
- Oversized Throttle Friction Knob



## 9.9HP TILLER

- Shift-in-Grip  
*For one-handed operation*
- Throttle Friction Knob  
*For locking in speed*
- Full-Tilt Lock  
*For securing tiller while trailering*
- Easy-Reach Stop Button



## THE POWER TO DO MORE

Standard on 25hp ProKicker outboards  
SmartCraft® compatibility keeps you fully connected with your engine through digital gauges, touchscreen VesselView® displays and advanced technologies such as Troll Control, which helps you manage speed by locking in engine rpm and adjusting it in 10-rpm increments.

## MAINTENANCE MADE EASY

Spend less time on service and more time fishing with our no-spill oil change system, easy-change gear lube, quick-connect flush system and lifetime maintenance-free valve train.

## SPECIFICATIONS

HORSEPOWER	9.9 EFI	15 EFI	25 EFI
HP/kW @ Prop	9.9/7.4	15/11.1	25/18.4
Max RPM (WOT)	5,000 - 6,000	5,700 - 6,200	5,400 - 5,800
Cylinder/Configuration	I-2	I-2	I-3
Displacement ( cc )	209cc / 12.8cid	333cc / 20.3cid	500cc / 30.5cid
Fuel System	EFI	EFI	EFI
Alternator Amp/Watt	12/145 Electric	12/145 Electric	17/210 Electric
Starting	Electric w/manual backup	Electric w/manual backup	Electric
Gear Ratio	2.42:1	2.15:1	2.17:1
Propeller	5P 4-Blade	5P 4-Blade	Sold separately
Steering	Tiller or Remote	Tiller or Remote	Remote
Trim Positions	Power Tilt	Power Tilt	Power Tilt
SmartCraft Technology	No	No	Yes
Operator Warning System	Engine Guardian	Engine Guardian	Engine Guardian
Shaft Length (in)	20/25	20/25	20/25
Shaft Length (mm)	508/635	508/635	508/635
Dry Weight (lbs/kgs)	111/50.3	122/56	146/66.3

\*Dry Weight: Lightest version model, excludes engine oil, rigging, hardware.



**WARRANTY** | Mercury ProKicker outboards used for recreational purposes come with a standard three-year limited warranty and industry-leading three-year corrosion warranty.

