



15 & 25HP

SeaPro™ Outboards

SMALL ENGINES BUILT TO TAKE ON BIG JOBS.

Pound for pound, it's hard to beat the capabilities of Mercury 15 and 25hp SeaPro outboards. They're calibrated for long hours of continuous commercial operation. Light and efficient, SeaPro outboards help you move more with less fuel, while delivering the power, speed and acceleration you need to keep your operations running on time.


- Electronic fuel injection delivers surefire starting in all weather
- High-volume air intake boosts torque for moving heavy loads with ease
- Class-leading alternator provides powerful battery-charging output at all speeds
- Smooth, quiet operation promotes comfortable all-day driving
- Durable alloys and serviceable anodes protect against corrosion in harsh conditions

MERCURYMARINE.COM/15-25HPSEAPRO



 **MERCURY**
GO BOLDLY.®

THE MERCURY TILLER: GET AHOLD OF BETTER BOAT CONTROL

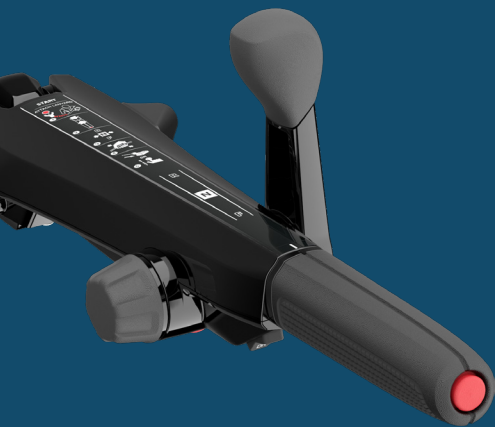

INTUITIVE HANDLING

The nearly 23-inch tiller features an oversized shift lever and an engine stop button on the end of the grip. So you'll never have to reach for what you need.

ADJUSTABLE CONTROL

The Mercury tiller adapts to you, not the other way around. You can reverse the grip for left- or right-handed throttling and laterally adjust the tiller angle for better leverage and control.

COMFORTABLE SETTINGS

You can set the down-angle stop to hold the tiller at the right height for comfortable steering while seated or standing. Throttle friction can also be adjusted to help hold speed.

MAKE ANY JOB EASIER WITH SMARTCRAFT®

Standard on 25hp SeaPro outboards
SmartCraft compatibility keeps you fully connected through digital gauges, touchscreen VesselView® displays and advanced technologies such as Troll Control, which helps you manage speed by locking in engine rpm and adjusting it in 10-rpm increments.

MAINTENANCE MADE EASY

Spend less time on service and more time on the clock with our no-spill oil change system, easy-change gear lube, water-separating fuel filter and lifetime maintenance-free valve train.

SPECIFICATIONS

HORSEPOWER	15	25
HP/kW @ Prop	15/11.1	25/18.4
Max RPM (WOT)	4,500 - 5,500	5,400 - 5,800
Cylinder/Configuration	I-2	I-3
Displacement (cc)	333cc / 20.3cid	500cc / 30.5cid
Bore & Stroke (in / mm)	2.40 x 2.24 / 61 x 57	2.40 x 2.24 / 61 x 57
Fuel Induction System	2-Valve, Single Overhead Cam (SOHC)	2-Valve, Single Overhead Cam (SOHC)
Fuel System	EFI	EFI
Alternator Amp/Watt	12/145 Electric	17/210 Electric
Starting	Manual or Electric	Manual or Electric
Gear Ratio	2.15:1	2.17:1
Trim Positions	6 Manual	6 Manual
Shallow Water Drive	Standard	Standard
Remote Fuel Tank (Gal / L)	Standard 3.2 / 12	Standard 6.6 / 25
Operator Warning System	Engine Guardian	Engine Guardian
Shaft Length (in)	15/20	15/20
Shaft Length (mm)	381/508	381/508
Dry Weight (lbs/kgs)	105/47.5	132/60.1

*Dry Weight: Lightest version model, excludes engine oil, rigging, hardware.



WARRANTY | Mercury SeaPro outboards come with a standard two-year limited warranty and industry-leading two-year corrosion warranty.